



## SPECIFICATIONS LITHIUM PRIMARY BATTERIES

### ER14335S 3.6V 900mAh


Lithium-thionyl chloride batteries

Cell size references: 2/3UM3,2/3R6,2/3AA,

#### Electrical characteristics

(Stored for one year or less)

Nominal capacity	900mAh
Nominal voltage	3.6V
Max continuous discharge current	50mA
Weight	10g
Volume	6.5cc
Operate temperature	-40 °C ~ +165 °C

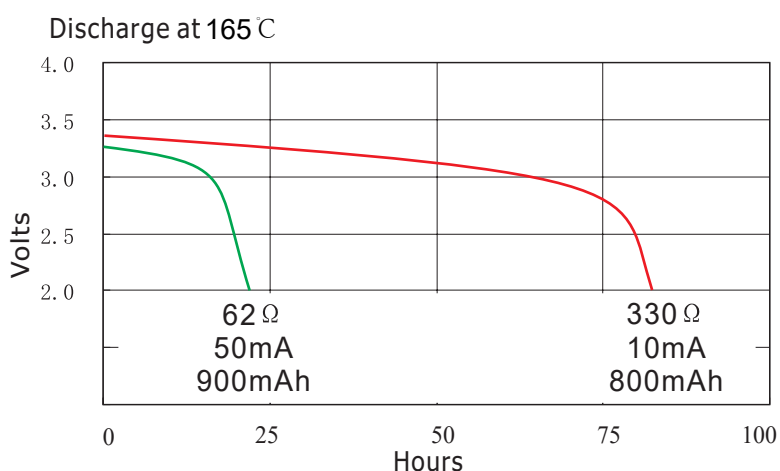

#### Key features

- High and stable operating voltage
- Low self-discharge rate  
Less than 1% after 1 year of storage at +20 °C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

UL Component Recognition  
File Number MH 29130

#### Main applications

- Deep hole drilling
- Geothermal applications
- Directional survey measurement
- Computer real-time clocks
- Automotive electronics
- Professional electronics

.....

#### WARNING :

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 100 °C, incinerate or expose contents to water.