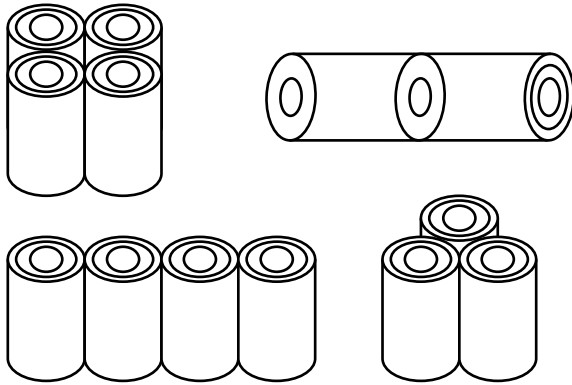
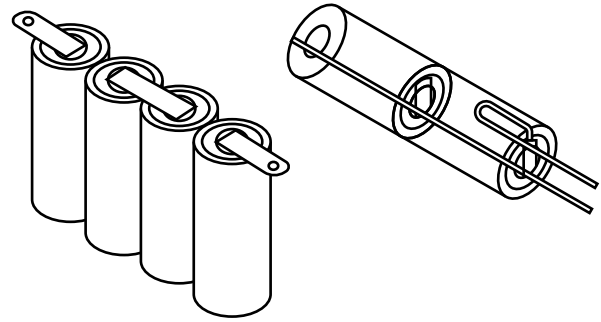


ACCORDING TO SPACE SIZE:
DESIGN THE PLACEMENT METHOD ACCORDING TO



CUSTOMIZED:
DESIGN THE APPROPRIATE LINK MODE



BRAND	BATTERY MODEL	MAXIMUM TEMPERATURE	OCV	CAPACITY	DIMENSION	DIMENSION	STORAGE (MAX.)
STEATITE	BAT-13	165°C	19.5V	26AH	-----	-----	-----
GMB	ER 34 SERIES 26 SERIES 18 SERIES 14 SERIES	150 °C	19.5V	25~27AH	SUPPORT	SUPPORT	+30 °C

ADVATAGES:

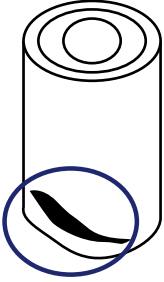


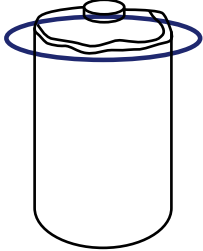

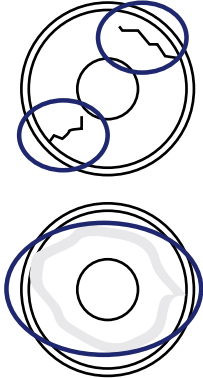
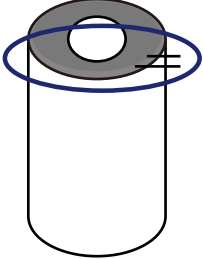

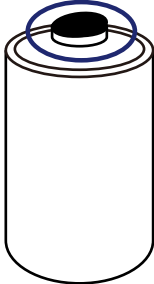
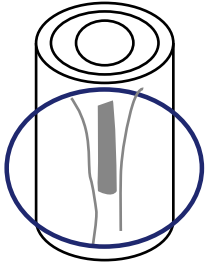
- Stable high operating voltage and high capacitance
- High energy density, high stable current
- Wide operating temperature rages (-30°C ~+150°C)
- Low self-discharge rate
(annual self-discharge rate is less than 3% at +25°C)
- Excellent environmental application characteristics
- Stainless steel case
(low magnetic resistance to environmental erosion)
- High temperature adhesive printing

FEATURES:

- A positive structure with proprietary technology
- Stainless steel - glass airtight package
- Non-combustible electrolyte
- High short circuit safety
- Comply with GB 8897.4-2008 technical requirements
- Meet technical requirements of IEC60086.4:2014

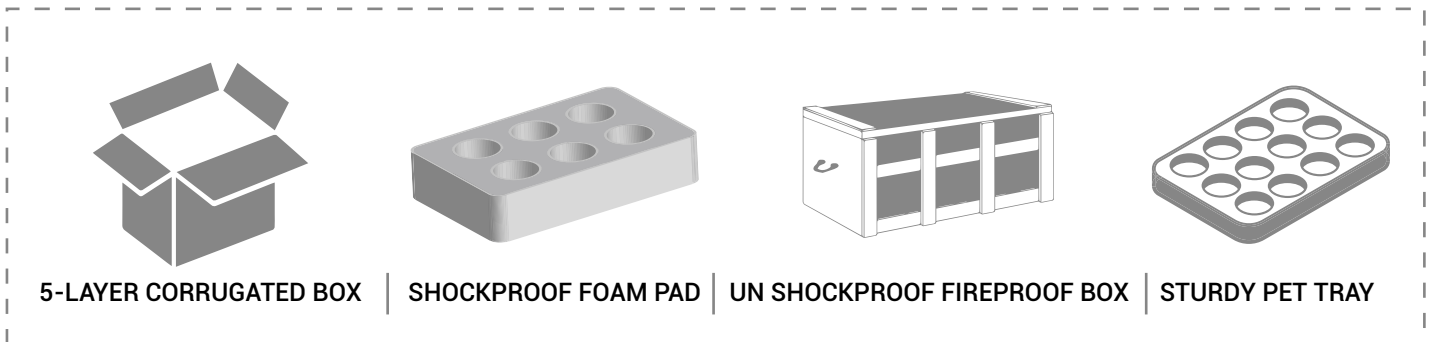
WARNING: DO NOT CHARGE, SHORT CIRCUIT, HEAT MORE THAN 150°C, DECOMPOSE, PUT INTO WATER, DIRECTLY IN THE BATTERY SHELL SURFACE WELDING, OTHERWISE MAY CAUSE EXPLOSION, COMBUSTION AND INTERNAL ACID LEAKAGE OF THE BATTERY.

ABOUT ACCEPTANCE CRITERIA:

<p>1</p> 	<p>2</p> 	<p>3</p> 	<p>4</p> 	<p>5</p> 
<p>THE BATTERY SHELL IS NOT DEFORMED</p>	<p>THE BATTERY EDGE IS NOT RAISED</p>	<p>UNIFORM SEALING COATING</p>	<p>THE BATTERY EDGE IS SMOOTH AND NEAT</p>	<p>THE SEALING COATING HAS NO BUBBLES OR BULGES</p>
<p>6</p> 	<p>7</p> 	<p>8</p> 	<p>9</p> 	<p>10</p> 
<p>THE SEALING COATING IS FREE OF CRACKS AND HOLIDAYS, AND THE UNDERLYING METAL WILL NOT BE EXPOSED</p>	<p>THE SEALING COATING WILL NOT BE TOO THICK</p>	<p>THE SEALING COATING SHALL BE FREE OF POLLUTANTS AND RUST</p>	<p>THERE IS NO OBVIOUS SCRATCH OR CONTAMINATION ON THE SHELL AND COATING</p>	<p>THE POSITIVE T-HEAD WILL NOT BE DISTORTED</p>

ABOUT PACKAGING:

A VARIETY OF PACKAGING METHODS ARE PROVIDED, WHICH CAN BE SELECTED ACCORDING TO THE PRODUCT.



GET FREE SAMPLES (SINGER):

STEP 1



SUBMIT YOUR SAMPLE
PURCHASE ORDER TO US.

STEP 2



WHEN YOU SUBMIT THE BULK ORDER,
WE WILL DEDUCT THE SAMPLE
ORDER FEE FROM THE BULK ORDER.

ABOUT CERTIFICATIONS:

SOME OF OUR AGENTS HAVE CUSTOMIZED POPULAR PRODUCTS AND PASSED RELEVANT CERTIFICATION TESTS.



UN38.3



Rohs

ABOUT TRANSPORTATION:

A VARIETY OF PACKAGING METHODS ARE PROVIDED, WHICH CAN BE SELECTED ACCORDING TO THE PRODUCT.
10-15 DAYS (REGULAR TRANSPORTATION MODE)



LAND TRANSPORTATION



AIR TRANSPORT



OCEAN SHIPPING